

INSTRUCTIONS

Applications:


Tubular Motors are used for the automatization of screens, roller shutters and sun protection systems. The motors are compact, easy to install and to manipulate, reliable, and are used for domestic purposes, in offices, industrial buildings, stores, garages, etc. ...

Installation:

1. The power connected to the motor must be the power mentioned on the label on the motor.
2. Make sure the adaptation set is in accordance with the tube and insert the motor.
3. Mount the motor and the tube and make sure they are mounted firmly.

ATTENTION!! The use of long screws can damage the motor.


4. Connect the motor:

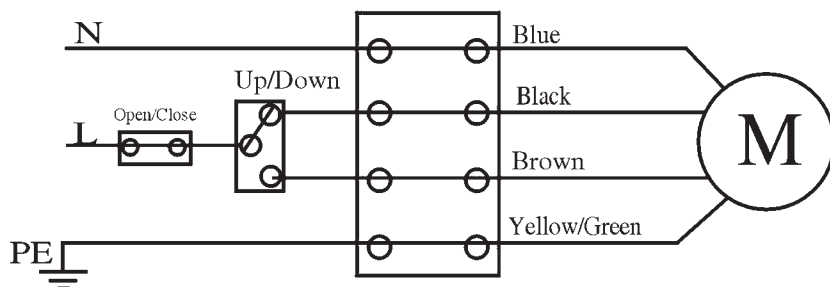

6. Check the UP and DOWN functions of the motor.

Limit switch setting

1. Use the limit-adjusting pole to set the limit position according to the motor's direction. "+" Means increase the shutter's moving space, "-" means reduce the shutter's moving space.

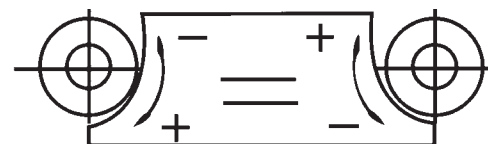

2. Check the UP and DOWN functions of the motor and check the moving space. Notice:

1. Installation and wiring must be in compliance with your local building and electrician codes and should be done by a qualified electrician.
2. When installed make sure the motor is working properly and the moving wise of the tube is vertical with the orbit of the shutter.
3. Make sure the wiring cannot be damaged by moving parts.
4. The electrical connection must be installed with a grounding outlet. Connecting to the ground is necessary.



www.seco.gr

Agiou Dimitriou 263, TK. 17342, Athens, Greece
Tel. 0030 210 9846222
Fax 0030 210 9822276

